




PRO-FIT tee 90° equal PVC-U metric

Model:

- Outlet: A = solvent cemented socket metric
- Outlet: B = solvent cemented spigot in combination with reducing socket metric
- Direct connection from fitting to fitting allowing shortest possible overall length

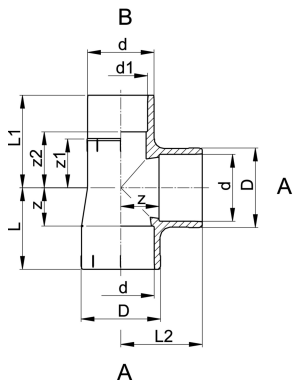

d (mm)	d1 (mm)	PN (bar)	Code	SP	Weight (kg)	z (mm)	z1 (mm)	z2 (mm)	D (mm)	L (mm)	L1 (mm)	L2 (mm)
20	16	16	721 200 306	10	0.017	11	17	19	25	27	33	27
25	20	16	721 200 307	10	0.022	14	19	22	31	33	38	33
32	25	16	721 200 308	10	0.051	17	24	27	38	39	46	39
40	32	16	721 200 309	10	0.098	23	30	34	47	47	56	49
50	40	16	721 200 310	10	0.164	26	36	41	58	57	67	57
63	50	16	721 200 311	10	0.329	33	45	52	73	71	83	71

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>