



Direct-acting 2/2 or 3/2-way pivoted armature valve

- Direct-acting, media-separated valve up to DN 8
- Maintenance-free pivoted armature technology
- Vibration-proof, block screwed coil system
- Service-friendly, robust manual override
- Explosion-proof variants

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 1087 Timer, form A according to DIN EN 175301-803	▶
	Type 2518 Cable plug, form A according to DIN EN 175301-803	▶
	Type 2509 Cable plug, form A according to DIN EN 175301-803	▶

Type description

The 0121 valve is a direct-acting, media separated pivoted armature valve. It is available as a 2/2 and 3/2-way variant. As a 3/2-way variant, it can be used as a distributor or mixing valve. Various diaphragm materials and circuit functions are available depending on the actual application. The range of bodies includes stainless steel, PTFE and PVC versions. The solenoid coils are moulded with a chemically resistant epoxy. Since the coil system is separated from the medium by a diaphragm, the valve is especially suitable for critical media such as aggressive acids and lyes. The 0121 is equipped with manual override for start-up and testing. To reduce energy demands, all the coils can be delivered with electronic power reduction or as an impulse variant. The switching status can be indicated via position feedback as a binary or NAMUR signal.

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

Table of contents

1. General technical data	3
2. Circuit functions	5
3. Approvals and conformities	6
3.1. General notes	6
3.2. Conformity	6
3.3. Standards	6
3.4. Explosion protection.....	6
3.5. North America (USA/Canada)	6
4. Materials	7
4.1. Bürkert resistApp.....	7
4.2. Material specifications	7
5. Dimensions	8
5.1. Standard version.....	8
5.2. Explosion-proof version.....	9
Terminal box version	9
Cable version.....	9
6. Device/Process connections	10
6.1. Pin assignment standard version.....	10
6.2. Pin assignment explosion-proof version	10
7. Performance specifications	11
7.1. Pressure range and flow rate	11
Standard version.....	11
Explosion-proof version.....	11
8. Product accessories	12
8.1. Accessories standard version	12
8.2. Accessories explosion-proof version.....	12
8.3. Cable glands for ATEX/IECEX terminal box	13
8.4. Special tool to turn the terminal box	13
9. Ordering information	13
9.1. Bürkert eShop	13
9.2. Bürkert product filter	14
9.3. Bürkert Product Enquiry Form	14
9.4. Ordering chart	14
Standard version.....	14
Explosion-proof version.....	15
9.5. Ordering chart accessories.....	15
Cable plug Type 2518, form A according to DIN EN 175301 - 803	15
Cable plug Type 2509, form A according to DIN EN 175301 - 803.....	16
Cable glands for ATEX/IECEX terminal box	16
Mounting plate complete for DIN rail mounting	16
Locking ring	17

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

1. General technical data

Product properties	
Dimensions	Further information can be found in chapter "5. Dimensions" on page 8.
Materials	
Seal	FKM FFKM EPDM
Body	PTFE PVC (resistant according to DIN 8062, 8061) Stainless steel 1.4401 PVDF (on request)
Material resistance	Further information can be found in chapter "4.1. Bürkert resistApp" on page 7.
Weight	
Standard version	Stainless steel body: 0.9 kg PVC body: 0.38 kg PTFE body: 0.5 kg
Explosion-proof version	Stainless steel body: 1.15 kg PVC body: 0.62 kg PTFE body: 0.75 kg
Orifice	DN 2...DN 8 FFKM only possible up to DN 6.0
Circuit function	A, B, C, D, E and F Further information can be found in chapter "2. Circuit functions" on page 5.
Thermal insulation class of solenoid coil	Epoxy coil class H
Performance data	
Duty cycle	
With stainless steel	100 % continuous operation
With PTFE	40 % duty cycle (60 % intermittent operation) in 10 min at 8 W version 100 % continuous operation for 5 W version or high-capacity electronic
With PVC	10 % duty cycle (10 min) 100 % continuous operation for version with high-capacity electronic
Switching frequency	
Standard version	Max. 100/min with AC Max. 10/min for UC (high-capacity electronic)
Explosion-proof version	Medium temperature up to + 70 °C: max. 20/min Medium temperature up to + 90 °C: max. 5/min
Switching time¹⁾ standard version	
Frequency AC	Opening: 20 ms Closing: 11 ms
Frequency DC	Opening: 11 ms Closing: 8 ms
Response time¹⁾ explosion-proof version	
Orifice DN 2...DN 8	Opening: 30 ms Closing: 40 ms
Electrical data	
Power consumption standard	
Frequency AC	Inrush: 30 VA Hold: 15 VA Hold: 8 W
Frequency DC	Cold: 11 W Warm: 8 W
Power consumption explosion-proof version	
Frequency AC/DC	Inrush: 40 W Hold: 3 W

Voltage

Standard version	24 V 50 Hz, 110 V 50 Hz, 230 V 50 Hz, 120 V 60 Hz, 240 V 60 Hz, 12 V DC, 24 V DC (further voltages on request)
Explosion-proof version	24 V, 230 V (further voltages on request)
Voltage tolerance	± 10 %

Medium data

Operating medium

With FKM	Oxydizing acids and substances, hot oils with additives, salt solutions, waste gases
With FFKM	Aggressive mediums, hot air, hot oils, aromatics, ether, esther, ketones
With EPDM	Alkalis, acids to medium concentrations, alkaline washing and bleaching lyes
All Materials	Further information can be found in chapter “4.1. Bürkert resistApp” on page 7

Medium temperature standard version

With body material PTFE or stainless steel	EPDM: - 30 °C...+ 90 °C
	FKM: - 10 °C...+ 90 °C
	FFKM: - 10 °C...+ 90 °C
With body material PVC	EPDM: - 30 °C...+ 50 °C
	FKM: - 10 °C...+ 50 °C
	FFKM: - 10 °C...+ 50 °C

Medium temperature explosion-proof version

With body material PTFE or stainless steel	EPDM: - 20 °C...+ 90 °C
	FKM: - 10 °C...+ 90 °C
	FFKM: - 10 °C...+ 90 °C
With body material PVC	EPDM: - 20 °C...+ 50 °C
	FKM: - 10 °C...+ 50 °C
	FFKM: - 10 °C...+ 50 °C

Viscosity	Max. 37 mm ² /s
-----------	----------------------------

Process/Port connection & communication

Electrical connection

Standard version	Plug contact according to DIN EN 175 301 - 803 form A for cable plug Type 2518 ▶ Plug contact according to DIN EN 175 301 - 803 form A for cable plug Type 2509 ▶ (Also available with pressed-in cable or terminal box on request.) Further information can be found in chapter “9.5. Ordering chart accessories” on page 15.
Explosion-proof version	Pressed-in cable cable (HO5RN-F3G, 3 × 0.75 mm ²) Terminal box without safety fuse (Information about ACP016 see operating manual.)

Approvals and conformities

Degree of protection

Standard version	IP65 with cable plug
Explosion-proof version	IP65
Explosion protection	Further information can be found in chapter “3.4. Explosion protection” on page 6.
North America (USA/Canada)	Further information can be found in chapter “3.5. North America (USA/Canada)” on page 6.

Environment and installation

Installation	As required, preferably with actuator upright
--------------	---

Ambient temperature

Standard version	Max. + 50 °C
Explosion-proof version	Max. + 55 °C

1.) Measurement at + 20 °C, 6 bar at the valve outlet, opening: pressure build-up 0...90 %, closing: pressure reduction 100...10 %

2. Circuit functions

Symbol	Description
	Circuit function A (CF A) 2/2-way solenoid valve Direct-acting Normally closed
	Circuit function B (CF B) 2/2-way solenoid valve Direct-acting Normally open
	Circuit function C (CF C) 3/2-way solenoid valve Direct-acting Normally closed
	Circuit function D (CF D) 3/2-way solenoid valve Direct-acting Normally open
	Circuit function E (CF E) 3/2-way mixing valve (solenoid valve)
	Circuit function F (CF F) 3/2-way distribution valve (solenoid valve) Direct-acting

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

3. Approvals and conformities

3.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available versions can be supplied with the below mentioned approvals or conformities.



3.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.





3.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3.4. Explosion protection

Approval	Description					
 	<p>Optional: Explosion protection according to category 2 (zone 1/21)</p> <p>Ex marking of the components according to the following table:</p>					
	<table border="1"> <thead> <tr> <th colspan="2">Coil Type ACP016</th> </tr> <tr> <th>Coils with cable outlet</th> <th>Coils with terminal box</th> </tr> </thead> <tbody> <tr> <td> <p>ATEX:</p> <p>EPS 16 ATEX 1 111 X II 2 G Ex mb IIC T4 Gb II 2 D Ex mb IIIC T130 °C Db</p> <p>IECEX:</p> <p>IECEX EPS 16.0049X Ex mb IIC T4 Gb Ex mb IIIC T130 °C Db</p> </td> <td> <p>ATEX:</p> <p>PTB 15 ATEX 1011 U II 2G Ex eb mb IIC T4 Gb II 2D EX mb tb IIIC T130 °C</p> <p>IECEX:</p> <p>IECEX PTB 15.0037 U II eb mb IIC T4 Gb II mb tb IIIC T130 °C Db</p> </td> </tr> </tbody> </table>	Coil Type ACP016		Coils with cable outlet	Coils with terminal box	<p>ATEX:</p> <p>EPS 16 ATEX 1 111 X II 2 G Ex mb IIC T4 Gb II 2 D Ex mb IIIC T130 °C Db</p> <p>IECEX:</p> <p>IECEX EPS 16.0049X Ex mb IIC T4 Gb Ex mb IIIC T130 °C Db</p>
Coil Type ACP016						
Coils with cable outlet	Coils with terminal box					
<p>ATEX:</p> <p>EPS 16 ATEX 1 111 X II 2 G Ex mb IIC T4 Gb II 2 D Ex mb IIIC T130 °C Db</p> <p>IECEX:</p> <p>IECEX EPS 16.0049X Ex mb IIC T4 Gb Ex mb IIIC T130 °C Db</p>	<p>ATEX:</p> <p>PTB 15 ATEX 1011 U II 2G Ex eb mb IIC T4 Gb II 2D EX mb tb IIIC T130 °C</p> <p>IECEX:</p> <p>IECEX PTB 15.0037 U II eb mb IIC T4 Gb II mb tb IIIC T130 °C Db</p>					


3.5. North America (USA/Canada)

Approval	Description
	<p>Optional (valid for coils): UL Hazardous Locations – Explosion Protection</p> <p>UL Listed for Hazardous Locations for USA and Canada Class I, Zone 1 Class I, Division 2, Group A, B, C and D Class II + III, Division 2, Group F and G</p>
	<p>Optional (valid for valves): UL Recognized for the USA</p> <p>The valves are UL Recognized for the USA according to:</p> <ul style="list-style-type: none"> • UL 429 (electrically operated valves) and UL 429A (Electrically Operated Valves for Fire Protection Service)
	<p>Optional (valid for valves): CSA for Canada</p> <p>The valves are CSA approved for Canada according to:</p> <ul style="list-style-type: none"> • CSA 139 (electrically operated valves)
	<p>Optional (valid for coils): FM (Factory Mutual) – Explosion Protection</p> <p>FM for Hazardous Locations for USA and Canada Class I, Zone 1 Class I, Division 1, Groups A, B, C and D Class II + III, Division 1, Groups E, F and G</p>

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

4. Materials

4.1. Bürkert resistApp

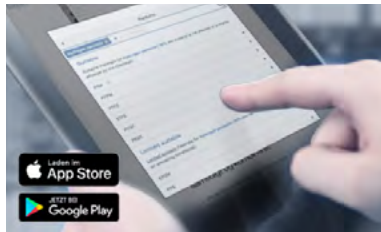

Bürkert resistApp – Chemical resistance chart


You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4.2. Material specifications

Note:

This sectional drawing shows the standard version with PVC housing and FKM seal.

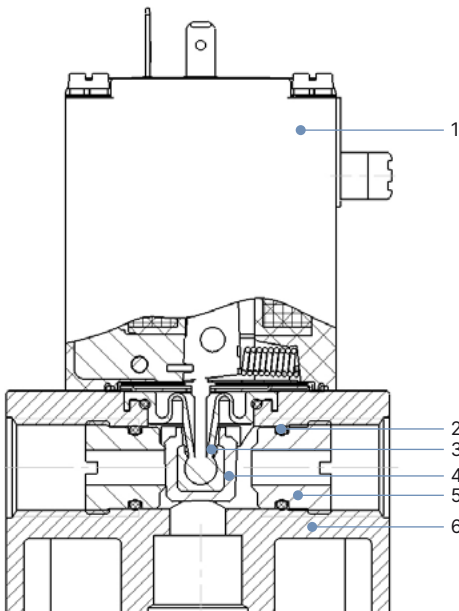


No.	Element	Material
1	Coil	Epoxy
2	O-ring	FKM, FFKM, EPDM
3	Toggle pin	PTFE
4	Seal	FKM, FFKM, EPDM
5	Seat	PTFE PVC (resistant according to DIN 8062, 8061) Stainless steel 1.4401
6	Valve body	PTFE PVC (resistant according to DIN 8062, 8061) Stainless steel 1.4401

5. Dimensions

5.1. Standard version

Note:

- Dimensions in mm
- The dimensions of the cable plug Type 2518 can be found in chapter “Cable plug Type 2518, form A according to DIN EN 175301 - 803” on page 15.
- The dimensions of the cable plug Type 2509 can be found in chapter “Cable plug Type 2509, form A according to DIN EN 175301 - 803” on page 16.

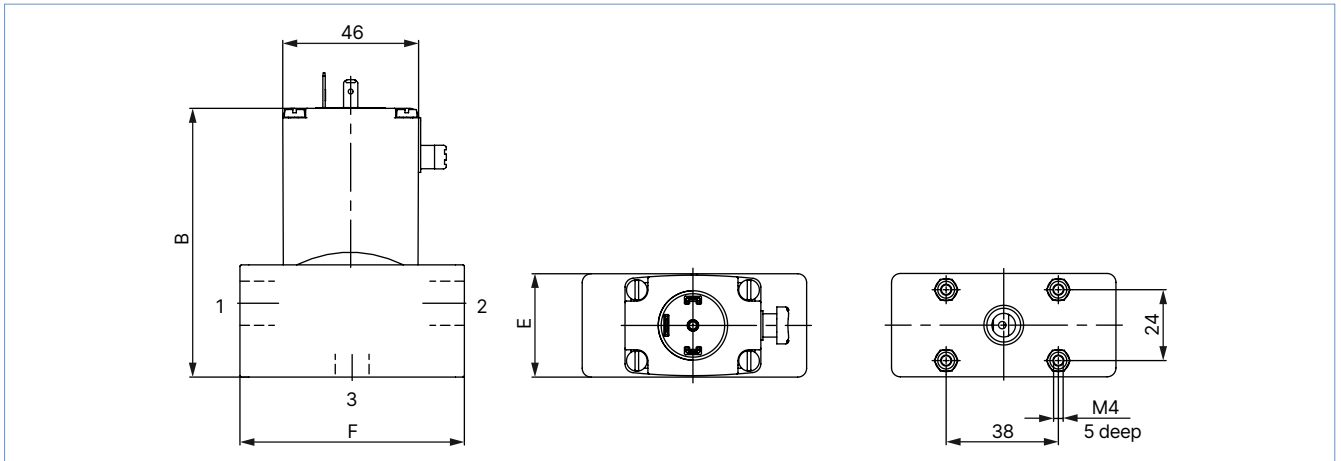


Body material	D	B	E	F
Stainless steel	G 1/4	89	32	76
PVC	G 3/8	91	35	65
PTFE	G 3/8	91	35	76

5.2. Explosion-proof version

Terminal box version

Note:

- Dimensions in mm
- Attaching device: M4 × 5 holes on the bottom of the housing on the hole pattern 38 × 24 mm

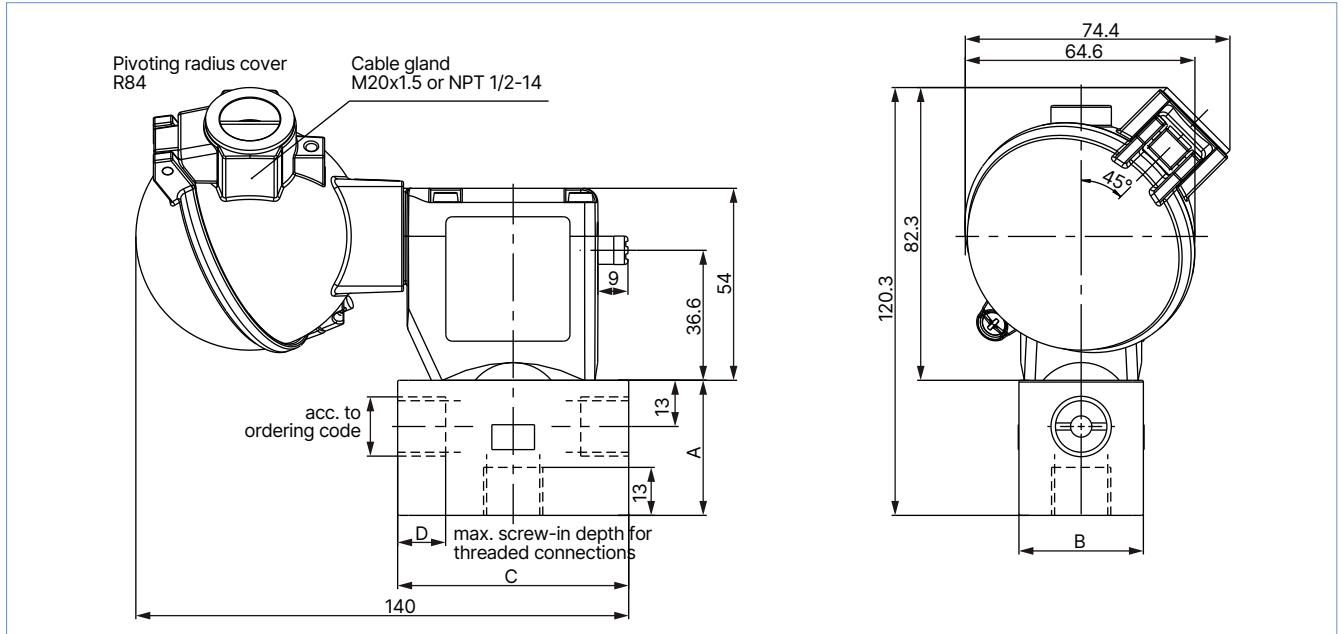


Body material	A	B	C	D
Stainless steel	36	32	76	19.5
PVC	38	35	65	17
PTFE	38	35	76	22.5

Cable version

Note:

- Dimensions in mm
- Attaching device: M4 × 5 holes on the bottom of the housing on the hole pattern 38 × 24 mm

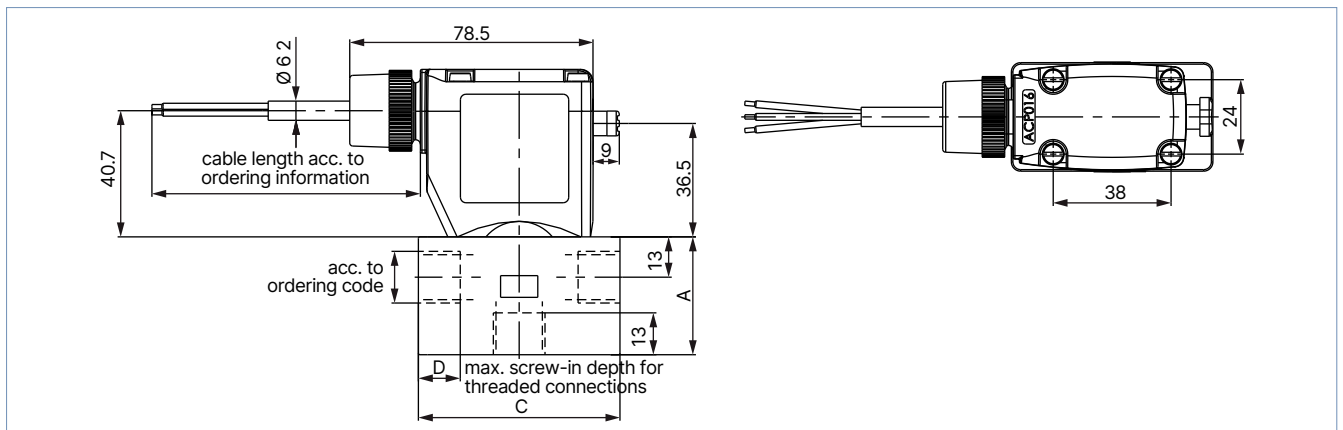

Body material	A	C	D
Stainless steel	36	76	19.5
PVC	38	65	17
PTFE	38	76	22.5

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

6. Device/Process connections

6.1. Pin assignment standard version

Note:

The pin assignment (marked No. 1, 2 and 3 in the drawing) depends on the circuit function. In the table, compare the respective pin assignment with the corresponding circuit function.

Circuit function	Connection 1	Connection 2	Connection 3	2-way	3-way
A	A	P	–		
B	P	B	–		
C	P	R	A		
D	R	P	B		
E	P1	P2	A		
F	A	B	P		

6.2. Pin assignment explosion-proof version

Note:

The pin assignment (marked No. 1, 2 and 3 in the drawing) depends on the circuit function. In the table, compare the respective pin assignment with the corresponding circuit function.

Circuit function	Connection 1	Connection 2	Connection 3	2-way	3-way
A	A	P	–		
B	P	B	–		
C	P	R	A		
D	R	P	B		
E	P1	P2	A		
F	A	B	P		

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

7. Performance specifications

7.1. Pressure range and flow rate

Standard version

Circuit function	DN	K _v value water	Pressure range ^{1.)}	
			Frequency AC ^{2.)} (50 or 60 Hz)	Frequency DC ^{2.)}
			[m ³ /h]	[bar]
A / F	2	0.1	0...6	0...3
	4	0.3 ^{3.)}	0...4	0...2
	6	0.6 ^{4.)}	0...2	0...1
	8	1.0	0...1	0...0.8
C / D	2	0.1	0...3	0...1.5
	4	0.3 ^{3.)}	0...2	0...1
	6	0.6 ^{4.)}	0...1	0...0.5
	8	1.0	0...0.3	0...0.3
B	2	0.1	0...6	0...3
	4	0.3 ^{3.)}	0...4	0...2
	6	0.6 ^{4.)}	0...2	0...1
	8	1.0	0...1	0...0.5
E	2	0.1	0...3	0...1.5
	4	0.3 ^{3.)}	0...2	0...1
	6	0.6 ^{4.)}	0...1	0...0.5
	8	1.0	0...0.2	0...0.2

1.) Pressure data: overpressure to the atmospheric pressure (deviating pressure range for 5 W version)

2.) Heat output 8 W

3.) Nominal diameter DN 4 and seal material FKM resp. FFKM K_v value reduces to 0.24 m³/h.

4.) Nominal diameter DN 6 and seal material FKM resp. FFKM K_v value reduces to 0.48 m³/h.

Explosion-proof version

Circuit function	DN	K _v value water ^{1.)}	Pressure range ^{2.)}
		[m ³ /h]	[bar]
A / F	2	0.1	0...6
	4	0.3 ^{3.)}	0...4
	6	0.6 ^{4.)}	0...2
	8	1.0	0...1
C / D	2	0.1	0...3
	4	0.3 ^{3.)}	0...2
	6	0.6 ^{4.)}	0...1
	8	1.0	0...0.3
B	2	0.1	0...6
	4	0.3 ^{3.)}	0...4
	6	0.6 ^{4.)}	0...2
	8	1.0	0...1
E	2	0.1	0...3
	4	0.3 ^{3.)}	0...2
	6	0.6 ^{4.)}	0...1
	8	1.0	0...0.2

1.) Measurement at +20 °C, 1 bar at the valve inlet and free outlet

2.) Pressure data: overpressure to the atmospheric pressure

3.) Nominal diameter DN 4 and seal material FKM resp. FFKM K_v value reduces to 0.24 m³/h.

4.) Nominal diameter DN 6 and seal material FKM resp. FFKM K_v value reduces to 0.48 m³/h.

8. Product accessories

8.1. Accessories standard version

Option	Variable code	Specifications
Oxygen versions	NL02	Suitable for applications with oxygen (non-metal materials that are in contact with the medium, are tested and approved according to BAM)
Increased purity requirements, e.g. oil, grease and silicone-free	NL50/ NL05	Wetted parts are specially cleaned and packaged in accordance with the valves
Electrical feedback	LF03	See Type 1060 ▶. Function as opener, closer or toggle switch depending on the connection (no IP65 achievable)
High-power electronics	CZ05	Inrush power 60 W, nominal holding current 3 W; with plastic versions 100 % duty cycle is now feasible
Vacuum version	NA02	Suitable for vacuum up to - 0.98 bar
Improved purity and tightness requirements	NA03	Wetted parts are specially cleaned and leak tested to 10 ⁻⁴ mbar x l/sec
Coil with reduced power (5 W)	–	Devices have lower pressure range; with plastic versions 100 % duty cycle is now feasible
Cable plug	JHxx/ JGxx/ JFxx	Cable plug is part of the delivery. Cable plug versions (according to DIN EN 175301 - 803 form A), see separate data sheet Type 2518 ▶ and Type 2509 ▶
Approvals	PD02	UR (UL Recognized)/CSA approval
	PE95	UL (UL Listed) approval
	PR05	cFMus approved coil Class I, Division 1, Groups A, B, C and D - T4 Class II, Division 1, Groups E, F and G - T4 Class III, Division 1 - T4 Class I, Zone 1, AEx mb IIC T4 Gb, Zone 21 AEx mb IIIC T130 °C Db Ex mb IIC T4 Gb; Ex mb IIIC T130 °C Db
	PU15	UL Listed for Hazardous Locations for USA and Canada, Class I, Zone 1, AEx eb mb IIC T4; Zone 21, AEx mb tb IIIC T130 °C / Class I, Div 2, Group A,B,C,D; Class II+III, Div 2, Group F,G
	PX41	EPS 16 ATEX 1111 X/IECEx EPS 16.0049X, 2G T4 IIC/2D T130 °C IIIC, Tamb - 40 °C...+ 60 °C, single and block mounting
Possible conformities (depending on the assembly)	–	EAC, drinking water, FDA





8.2. Accessories explosion-proof version

Option	Variable code	Specifications
Oxygen versions	NL02	Suitable for applications with oxygen (non-metal materials that are in contact with the medium, are tested and approved according to BAM)
Increased purity requirements, e.g. oil, grease and silicone-free	NL50/ NL05	Wetted parts are specially cleaned and packaged in accordance with the valves
Vacuum version	NA02	Suitable for vacuum up to - 0.98 bar
Increased purity and tightness requirements	NA03	Wetted parts are specially cleaned and leak tested to 10 ⁻⁴ mbar x l/sec

8.3. Cable glands for ATEX/IECEx terminal box

Note:

A polyamide cable gland is included in the scope of delivery. A nickel-plated brass version can be ordered for a surcharge, see "Cable glands for ATEX/IECEx terminal box" on page 16.

Description	Ex approvals		Dimensions										
	Certification	Identification											
Ex cable gland, Nickel-plated brass, 6...13 mm 	PTB 04 ATEX 1112 X, IECEx PTB 13.0027X	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68	 <table border="1"> <tr><td>TL</td><td>29...37 mm</td></tr> <tr><td>L</td><td>6 mm</td></tr> <tr><td>D</td><td>20 mm</td></tr> <tr><td>SW</td><td>24 mm</td></tr> <tr><td>E</td><td>27 mm</td></tr> </table>	TL	29...37 mm	L	6 mm	D	20 mm	SW	24 mm	E	27 mm
TL	29...37 mm												
L	6 mm												
D	20 mm												
SW	24 mm												
E	27 mm												
Ex cable gland, Polyamide, 7...13 mm 	PTB 13 ATEX 1015 X, IECEx PTB 13.0034X	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68	 <table border="1"> <tr><td>TL</td><td>36...45 mm</td></tr> <tr><td>L</td><td>10 mm</td></tr> <tr><td>D</td><td>20 mm</td></tr> <tr><td>SW</td><td>24 mm</td></tr> <tr><td>E</td><td>28 mm</td></tr> </table>	TL	36...45 mm	L	10 mm	D	20 mm	SW	24 mm	E	28 mm
TL	36...45 mm												
L	10 mm												
D	20 mm												
SW	24 mm												
E	28 mm												

8.4. Special tool to turn the terminal box


Note:

This special tool is not included in the scope of delivery of the valve, see "Cable glands for ATEX/IECEx terminal box" on page 16.

Description	Components of the set
Set SC02-AC10 	<ul style="list-style-type: none"> • Special wrench • Service manual

9. Ordering information

9.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

Order online now

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

9.2. Bürkert product filter




Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

9.3. Bürkert Product Enquiry Form

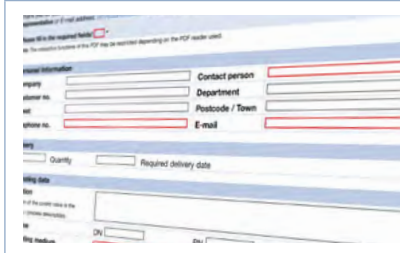

Bürkert Product Enquiry Form – Your enquiry quickly and compactly

Would you like to make a specific product enquiry based on your technical requirements? Use our Product Enquiry Form for this purpose. There you will find all the relevant information for your Bürkert contact. This will enable us to provide you with the best possible advice.

[Fill out the form now](#)

9.4. Ordering chart

Standard version

Note:

Articles with reduced delivery time

Circuit function	Port connection [inch]	Orifice [mm]	Body or seat material	Seal material	Article no.			
					024/DC [V/Hz]	024/50 [V/Hz]	230/50 [V/Hz]	120/60 [V/Hz]
With plastic or stainless steel body, manual override and cable plug (UC with silicon cable³⁾)								
CF A¹⁾ 2/2-way solenoid valve Direct-acting Normally closed 	G 3/8	4.0	PVC	FKM	049654 ☞	048940 ☞	047859 ☞	–
	G 3/8	4.0	PVC	EPDM	050795 ☞	050085 ☞	049267 ☞	–
	G 3/8	6.0	PVC	FKM	048749 ☞	049348 ☞	047810 ☞	049228 ☞
	G 3/8	6.0	PVC	EPDM	049337 ☞	049678 ☞	049291 ☞	–
	G 3/8	8.0	PVC	FKM	049697 ☞ ³⁾	052800 ☞	052302 ☞	–
	G 3/8	8.0	PVC	EPDM	048698 ☞ ³⁾	050967 ☞	050701 ☞	450543 ☞
	G 1/4	4.0	Stainless steel	FKM	055244 ☞	056934 ☞	052441 ☞	–
	G 1/4	4.0	Stainless steel	EPDM	136290 ☞	–	136292 ☞	–
	G 1/4	6.0	Stainless steel	FKM	040482 ☞	057086 ☞	054595 ☞	–
	G 1/4	6.0	Stainless steel	EPDM	049113 ☞	–	–	–
	G 3/8	4.0	PTFE	FFKM ²⁾	122632 ☞ ³⁾	–	077191 ☞	457453 ☞ ⁴⁾
	G 3/8	4.0	PTFE	FFKM	151733 ☞	–	136205 ☞	–
CF B¹⁾ 2/2-way solenoid valve Direct-acting Normally open 	G 3/8	4.0	PVC	FKM	–	–	050158 ☞	–
	G 3/8	6.0	PVC	EPDM	135416 ☞ ³⁾	–	–	–
	G 3/8	4.0	PTFE	FFKM	132096 ☞ ³⁾	–	–	–
	G 3/8	6.0	PTFE	FFKM	132097 ☞ ³⁾	–	–	–

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | valide) printed: 14.01.2025

Circuit function	Port connection	Orifice	Body or seat material	Seal material	Article no.			
					024/DC	024/50	230/50	120/60
					[V/Hz]	[V/Hz]	[V/Hz]	[V/Hz]
CF C 3/2-way solenoid valve Direct-acting Normally closed 	G 3/8	4.0	PVC	FKM	051701 𐀀	-	-	-
	G 3/8	6.0	PVC	EPDM	-	-	051577 𐀀	-
	G 3/8	4.0	PTFE	FFKM	-	-	130625 𐀀	-
	G 3/8	4.0	PTFE	FKM	044771 𐀀	-	-	-
	G 3/8	6.0	PTFE	FFKM 2.)	131364 𐀀3.)	-	-	-
	G 1/4	4.0	Stainless steel	EPDM	-	-	135858 𐀀	-
CF E 3/2-way mixing valve (solenoid valve) 	G 1/4	4.0	Stainless steel	FKM	-	-	042457 𐀀	-
	G 3/8	6.0	PVC	EPDM	048673 𐀀	-	-	-
	G 3/8	4.0	PTFE	FFKM	151715 𐀀	-	130934 𐀀	-
	G 3/8	4.0	PTFE	FFKM 2.)	135028 𐀀	-	-	-
CF F 3/2-way distribution valve (solenoid valve) Direct-acting 	G 3/8	6.0	PVC	FKM	049533 𐀀	052181 𐀀	047916 𐀀	-
	G 3/8	6.0	PVC	EPDM	040062 𐀀	048760 𐀀	050491 𐀀	-
	G 3/8	4.0	PTFE	FFKM 2.)	-	-	124239 𐀀	-
	G 3/8	6.0	PTFE	FFKM	141134 𐀀	-	-	-
	G 3/8	6.0	PTFE	FKM	051256 𐀀	-	-	-

-- not available

- 1.) The listed article numbers and circuit functions have a housing with straight pass.
- 2.) The valve seat seal material is FFKM, the O-ring seal material (seat) is FKM.
- 3.) The listed article numbers are equipped with a high-performance coil (60 W-inrush, 3 W-operation) and injected cable.
- 4.) The cable plug is not included in the scope of delivery.

Explosion-proof version

Note:

ATEX/IECEx versions are available on request. Further information can be found in chapter "3.4. Explosion protection" on page 6.

9.5. Ordering chart accessories

Cable plug Type 2518, form A according to DIN EN 175301 - 803

Note:

- Dimensions in mm
- For further versions see data sheet **Type 2518** ▶

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry (AC/DC)	0...250 V AC/DC	314802 𐀀
		With LED (AC/DC)	12...24 V AC/DC	314812 𐀀
		With LED and varistor (AC/DC)	12...24 V AC/DC	314820 𐀀
		With rectifier, LED and varistor	12...24 V AC/DC	314816 𐀀

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

Cable plug Type 2509, form A according to DIN EN 175301 - 803

Note:

- Dimensions in mm
- Without circuitry (standard)
- Refer to data sheet **Type 2509** ▶ for more information about the cable plug.

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry	0...250 V AC/DC	137943 𐀀

Cable glands for ATEX/IECEx terminal box

Note:

- A cable gland in polyamide version is included in the delivery. A nickel-plated brass version can be ordered at surcharge.
- Refer to **"8.3. Cable glands for ATEX/IECEx terminal box"** on page 13 for more information about Ex cable glands.
- Refer to **"8.4. Special tool to turn the terminal box"** on page 13 for more information about special wrench.

Description	Article no.
Ex cable gland, nickel-plated brass, 6...13 mm ¹⁾	773278 𐀀
Ex cable gland, polyamide, 7...13 mm ¹⁾	773277 𐀀
Set SC02-AC10: special wrench ²⁾ incl. service manual	293488 𐀀

1.) Cable diameter

2.) Not included in the scope of delivery of the valve



Mounting plate complete for DIN rail mounting

Description	Article no.
	013253 𐀀

1.) Use only with 2/2-way straight-through valves

DTS 1000010904 EN Version: R Status: RL (released | freigegeben | validé) printed: 14.01.2025

Locking ring

Description	Article no.
<p>Locking ring to prevent inadvertent manual actuation</p>  A technical line drawing of a cylindrical locking ring. The ring has a central bore and a small, circular protrusion on its outer surface. The drawing is shown in a perspective view.	<p>013372 </p>